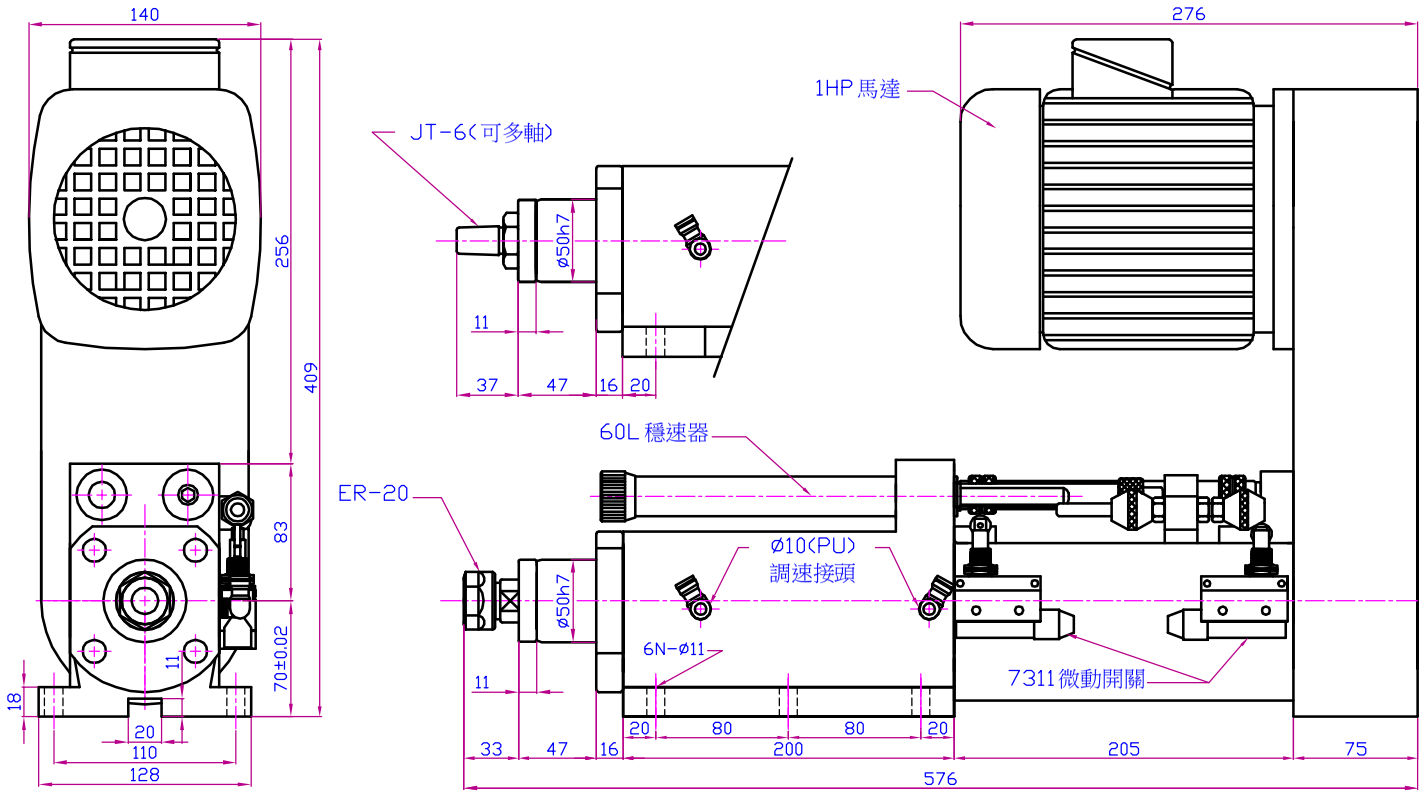

規 格 P 5100

Operating Pressure	5–7kg/cm²	Max. Speed	6,000 R.P.M	Cylinder Diameter	ø63
Max. Drilling Capacity	ø10(S45C)	Weight	45KG	Cylinder Area	Forward : 21.60CM²
Spindle Taper	*ER–20 *JT–6	Spindle Stroke	100M/M		Reverse : 11.6CM²
Motor	0.75KW–2P,4P	Breaking Stroke	Adjust By Flow Control Valve	Thrust	108KG(20KG/CM²)
				Spindle Speed	Optiona : 1000RPM~6000RPM

Wearing Parts			
Spindle Bearing	6004VX5	Piston Seal	APG–60*3,P–35*1
Pully Bearing	6005VX3	Oil Seal -Back Cover	G–58X1,AUS–35X1,ADH–35X1,S67*1,2057*1
Oil Seal - Front Cover	ADH–50X1,P–50X2,G–58X2		
Limit Switch	7311X2	Belt	5–PJ-Belt