


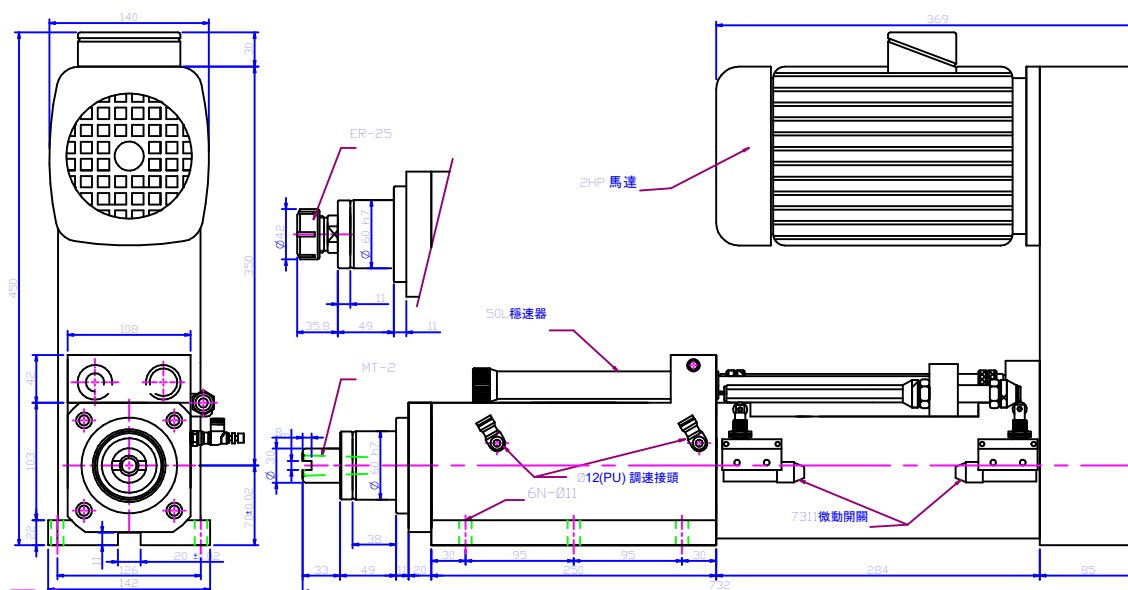

Operating Pressure	5-7kg/cm ²	Max. Speed	2,000 R.P.M	Cylinder Diameter	Ø80
Max. Drilling Capacity	Ø16(S45C)	Weight	62KG	Cylinder Area	Forward : 37.70CM ²
Spindle Taper	*ER-25 MT-2	Spindle Stroke	150MM		Reverse : 11.8CM ²
Motor	1.5KW-2P,4P	Breaking Stroke	Adjust By Flow Control Valve	Thrust	188.5KG(5KG/CM) ²
				Spindle Speed	Optiona : 500RPM~2000RPM
Wearing Parts					
Spindle Bearing	32005×2,6005V×1		Piston Seal	APG-80×3,P-40*1,SM-60*2	
Pully Bearing	6007*3			G-75×1,AUS-40×1,ADH-40×1	
Oil Seal - Front Cover	ADH-60×1,AUS-60*1,G-95×1				
Limit Switch	7311×2		Belt	8M Timing Belt	